


Series 1800

Polyurethane Lined
Abrasion Resistant PVC
Material Handling Hose
(Dry Application)

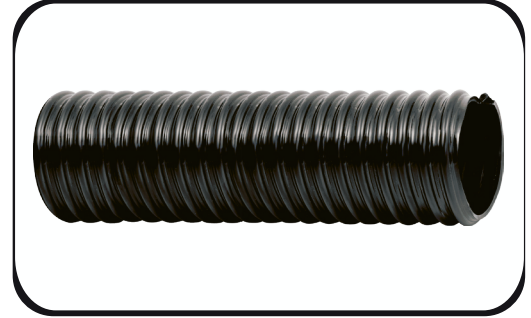

For conveying of solids where abrasive conditions are present. Specially formulated, static-dissipating HMV PVC compound provides sub-zero flexibility. The smooth polyurethane lining eliminates material build up.

Tube:	Polyurethane Lined (static dissipating)
Reinforcement:	High density rigid PVC helix
Cover:	Black HMV PVC - Convuluted
Temperature:	-40°F to +150°F

Part #	I.D. (In)	O.D. (In)	Approx. Liner Thickness (mm)	Vacuum Rating (In Hg) @ 70°F	W.P. @ 70°F (PSI)	Bend Radius @ 70°F (In)	Weight Per 100 Ft (Lbs)	Std. Length	Stock (Yes) or Min. Order
1800-150	1-1/2	1.86	0.6	29.0	50.0	2.0	42.0	100'	Yes
1800-200	2	2.40	0.7	29.0	40.0	3.0	59.0	100'	Yes
1800-250	2-1/2	3.07	0.9	29.0	40.0	3.0	80.0	100'	1000'
1800-300	3	3.65	1.0	29.0	40.0	4.0	118.0	100'	Yes
1800-400	4	4.77	1.2	29.0	35.0	6.0	195.0	100'	Yes
1800-600	6	6.83	1.5	28.0	30.0	12.0	350.0	50'/100'	Yes
1800-800	8	9.18	2.0	28.0	30.0	18.0	591.0	20'/50'	200'